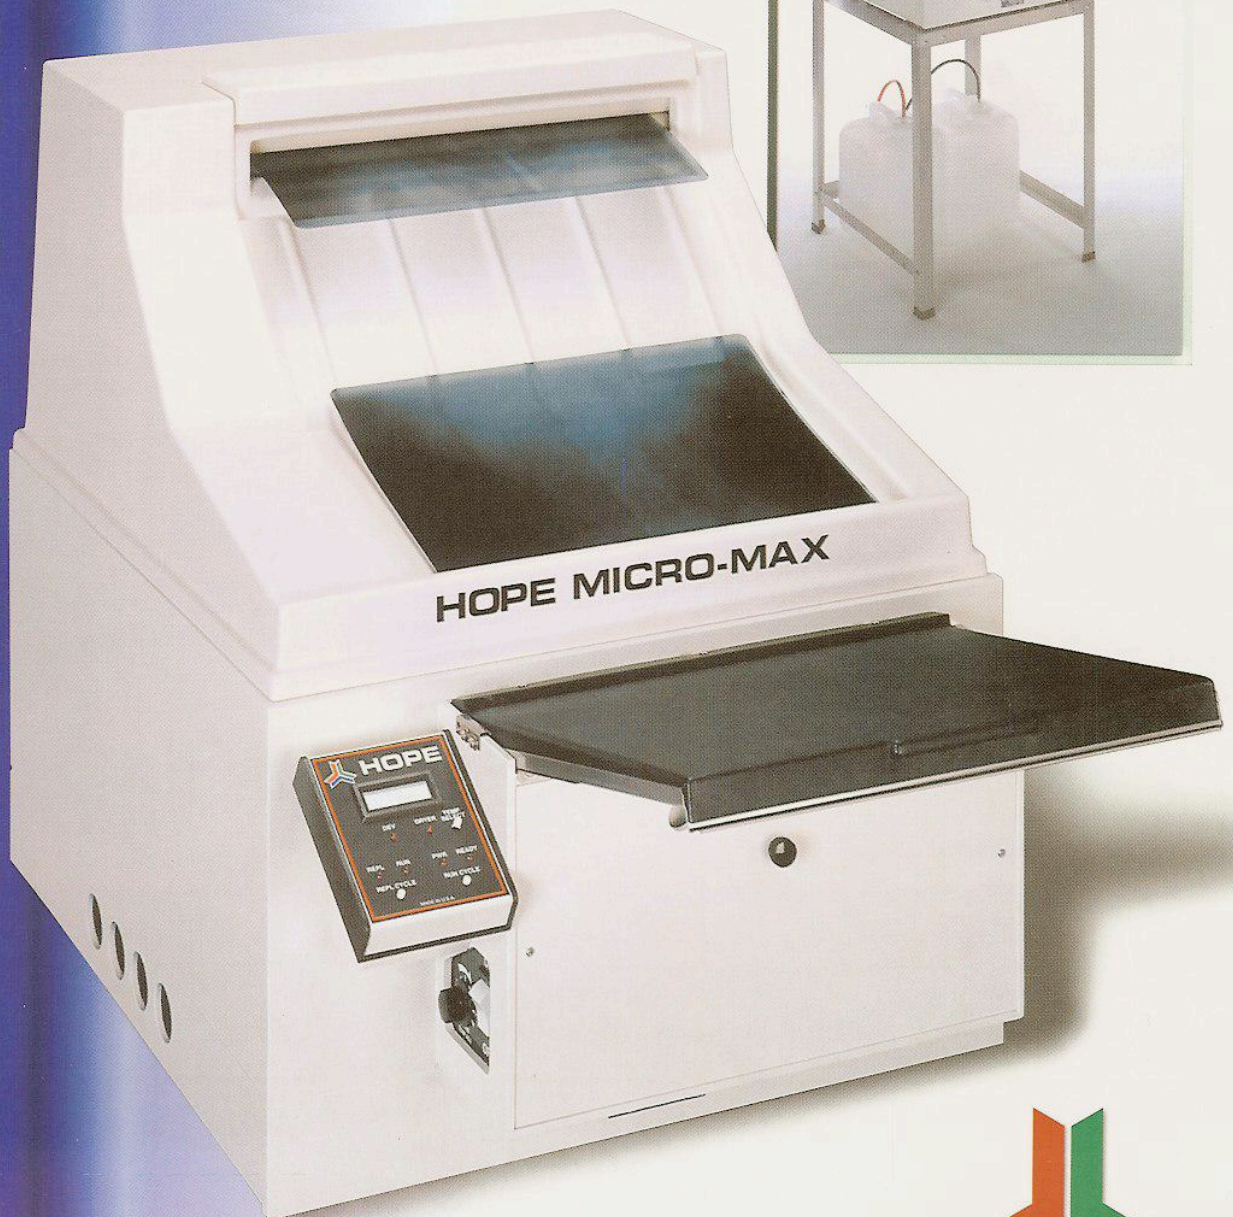
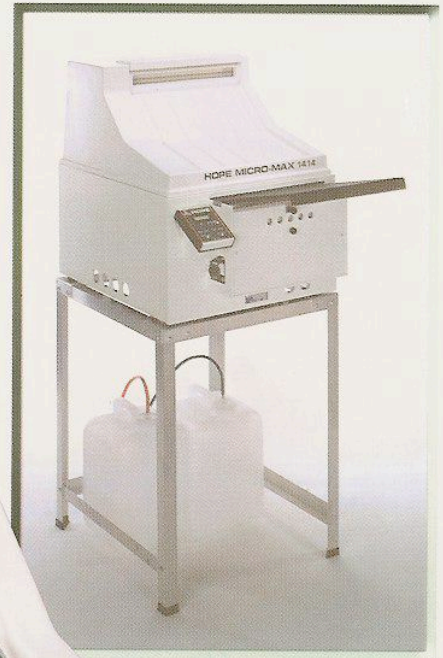



**MICRO-MAX**

# *Back to Basics!*

*The X-Ray Film Processor for the new millennium...*



*Table Top X-Ray Film Processor*




**HOPE**

# MicroMAX SPECIFICATIONS

The Back to Basics features of the MicroMax are designed to deliver high-output for its compact size.

The MicroMax is value priced to ideally serve the moderate film developing needs of the private practice market, including medical and veterinary clinics, diagnostic and chiropractic care centers as well as mobile diagnostic applications.

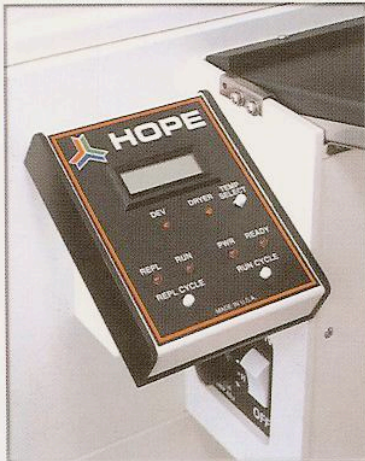

MicroMax versatile features:

**Compare for your self... then come to HOPE.**

- MicroMAX utilizes Hope's unique low torque, no crossover hard roller transport system
- MicroMAX's quiet, powerful, low energy dryer easily dries film under any condition
- MicroMAX's "dual" automatic replenishment system may replenish either by measuring film area or by flooded replenishment with manual operation back-up!
- Automatic energy and water saving standby system with built-in jog feature. Manual operation back-up!
- Film may be delivered either on top or rear exit
- MicroMAX may be installed thru-the-wall at either feed or dryer end
- MicroMAX may be set up at different speeds from 90 to 135 seconds
- Plugs into any standard wall outlet
- Cold water operation - no hot water required!
- Separate drains provide for quick draining of solutions, closed loop operation and easy use of silver recovery systems
- Light tight feed tray reduces darkroom time and eliminates costly darkroom passage systems
- Digital display of developer and dryer temperatures
- Sales and service supported by factory trained worldwide dealer network

Options available include...

- Short feed tray with light tight cover
- Rear exit receiving and light trap kit
- Variable speed control
- Closed loop system (no external plumbing needed)
- Receiving tray insert for full spine films
- Base stand

**Affordably priced - the MicroMAX provides more features and benefits for less!**

**Can you afford less than the best? If your reputation for quality is important... remember, HOPE products deliver quality.**

## MicroMax

**Processing Time:** (Leading edge to leading edge)\*

- Standard Processing Cycle - 135 Seconds
- Intermediate Processing Cycle - 112 Seconds
- Rapid Processing Cycle - 90 Seconds

\*Other processing cycles available

## Processing Capacity:

Standard Process:

76 (10"x12") films/hour; 45 (14"x17") films/hour

Rapid Process:

110 (10"x12") films/hour; 70 (14"x17") films/hour

## Film Size:

From 4"x4" (10cmx10cm) up to 14" (35.5cm) wide by any standard length

## Processor Tank Capacities:

Developer	1.2 gals/4.3 ltr
Fixer	.9 gal/3.3 ltr
Wash	.9 gal/3.3 ltr

## Electrical:

110v, 60 Hz, 14 amp  
220v, 50/60 Hz, 7.5 amp - 1 ph

## Water Requirements: (GPM)

Operating	1/3 GPM/1.45 ltr
Standby	0.00 gal/0.0 ltr

## Dimensions:

Length (overall)	38.25" (97.2cm)
Width	22.25" (56.5cm)
Height (without base)	25.25" (64.1cm)
Height (with base)	51.75" (131.5cm)


**Shipping Weight:** 195 lb/88.6 kg

## Standard

Includes light tight covered feed tray, replenishment tanks, manual and water supply hose.

## Warranty

Hope X-Ray offers a one year warranty on all parts.

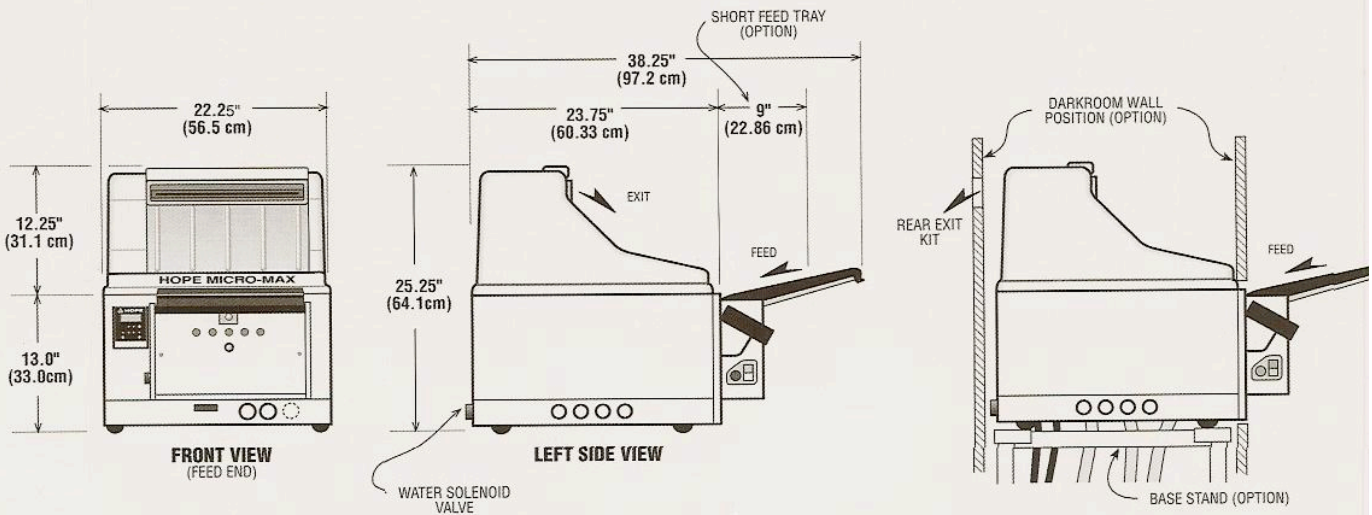

## HOPE X-RAY PRODUCTS, INC.

### USA CORPORATE OFFICE:

98 Railroad Drive, Warminster, PA 18974

Tel: (215)364-4941 FAX: (215)953-9697

**EUROPE:** Chemin de Rossan 5, 1132 LULLY, Switzerland

Tel: 021-801 93 69 FAX: 021-802 41 96

### AFRICA:

#115 Tecoma St., Wonderboom, Pretoria, South Africa 0182

Tel: (27)112 5620380 FAX: (27)112 5620006

Distributed by:



## TO ORDER CALL: JONES X-RAY, INC

Metro (972) 647-0111  
Fax (972) 647-1866  
(800) 259-4624

2606 W. Marshall Dr.  
Grand Prairie, TX 75042